




"Protecting People and Property"

BULLET, BLAST, AND FORCED ENTRY RESISTANT SYSTEMS

UST 3 ELECTRONIC TWO-WAY COMMUNICATION COUNTER MOUNT

- Heavy duty aluminum construction
- Dimensions: 2.8" x 2.8" x 13"
- Short circuit protection
- <1% distortion
- Dynamic noise reduction network
- Voice activated switch
- Level detection and attenuation control
- Duplex communication
- Background noise level monitoring
- Low current drain
- Reverse voltage and voltage protection

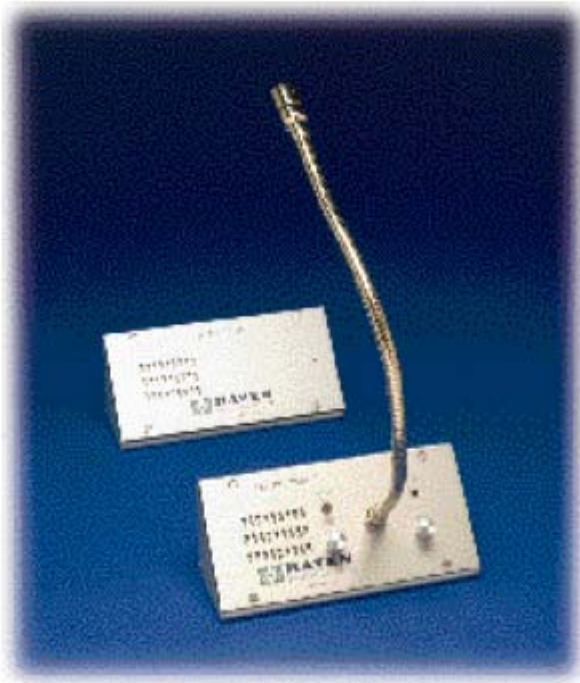

The UST 3 provides electronic two-way, hands-free communications (duplex) between a partition. The UST 3 is equipped with a factory adjusted VOX switch to prevent ambient noise (below 85 decibels) from activating the unit. The UST 3 contains two voice channels, each incorporating a microphone amplifier, VOX switch, compressor, and a power amplifier. The sound amplifier does not exceed a 0.2% total harmonic distortion rating.

The UST 3 is fully operational between 0 and 50°C.

Each order comes with an AC/DC power supply (120V AC stepped down to filtered 18V DC) and a one-year warranty.

